



Optimal Working Distance for Coupling Light into Single-Mode Fibers

Abstract

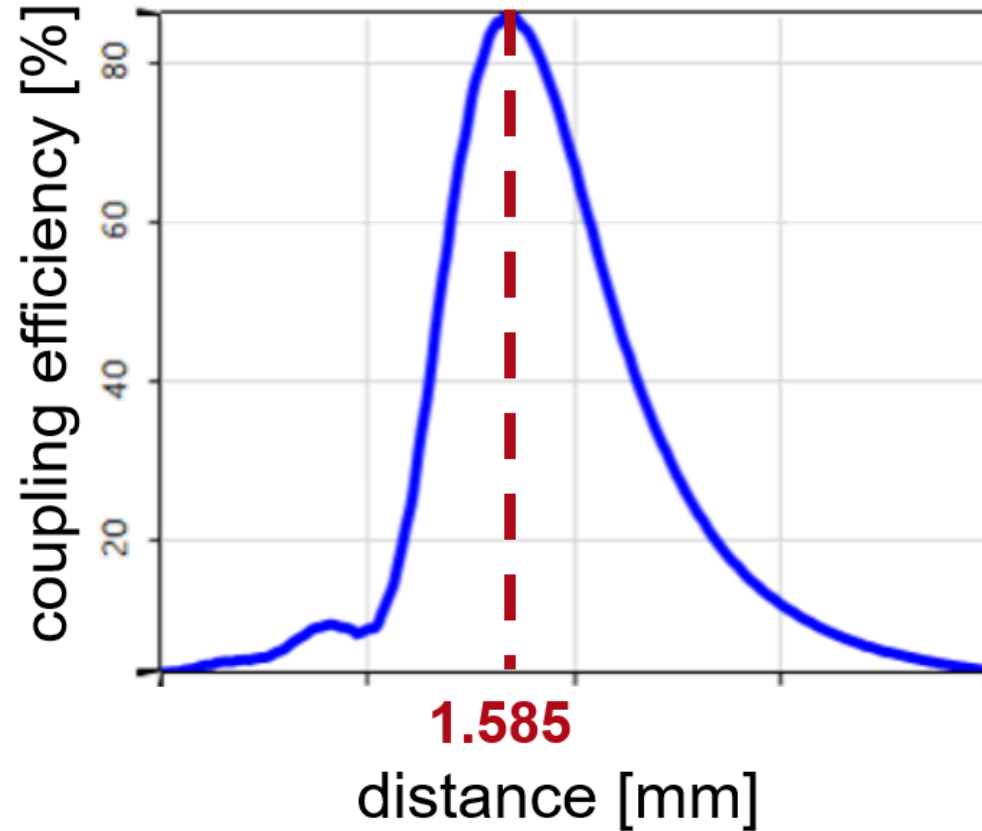


Single-mode optical fibers are widely used in different applications, and they play a crucial role in long-distance optical communication. Launching light into such kind of single-mode fibers can be a challenging task in practice. In this example, we select one commercially available lens, and show how to find the optimal working distance to achieve maximum incoupling efficiency. Particularly, we demonstrate that the optimal working distance found by field tracing differs from the focal distance predicted by ray optics.

Modeling Task

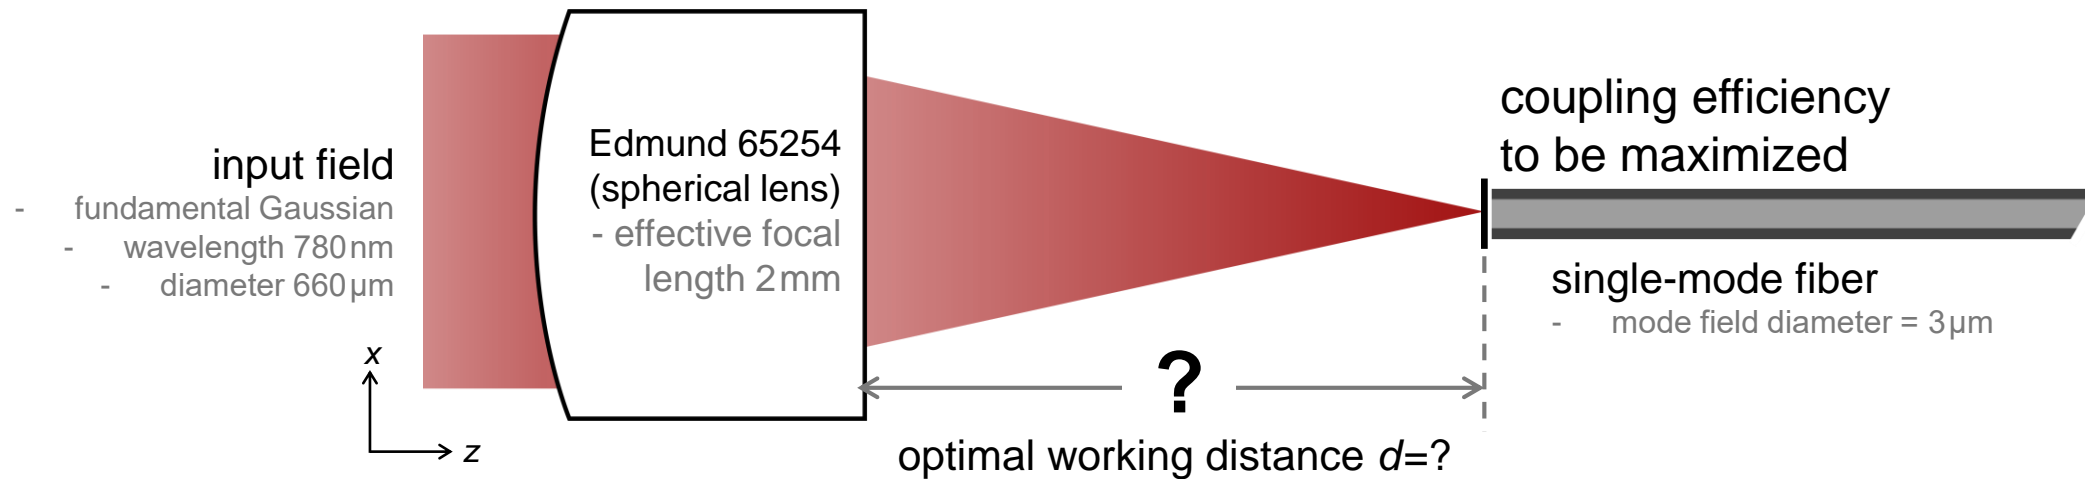


- Is it the best solution to place the fiber end at the ray-optics focal plane behind the lens?
- How to find the optimal working distance to achieve maximum incoupling efficiency?

Focal Distance Found by Using Ray Tracing

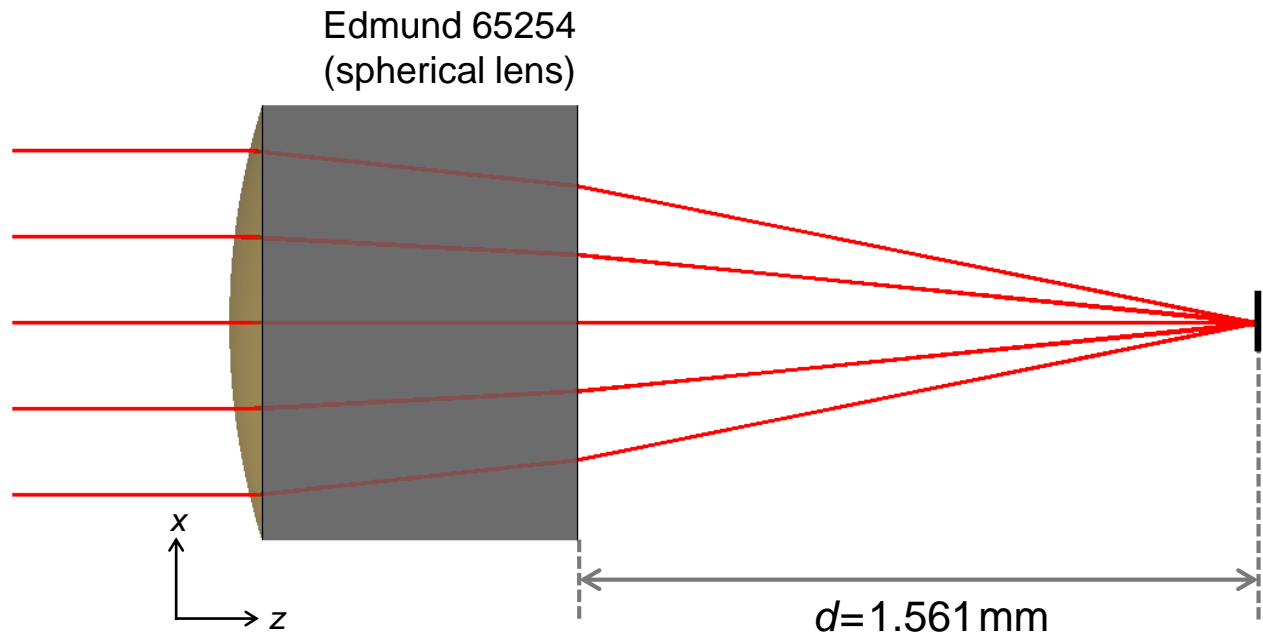


Focal distance for the spherical lens is found first by using ray tracing in VirtualLab.


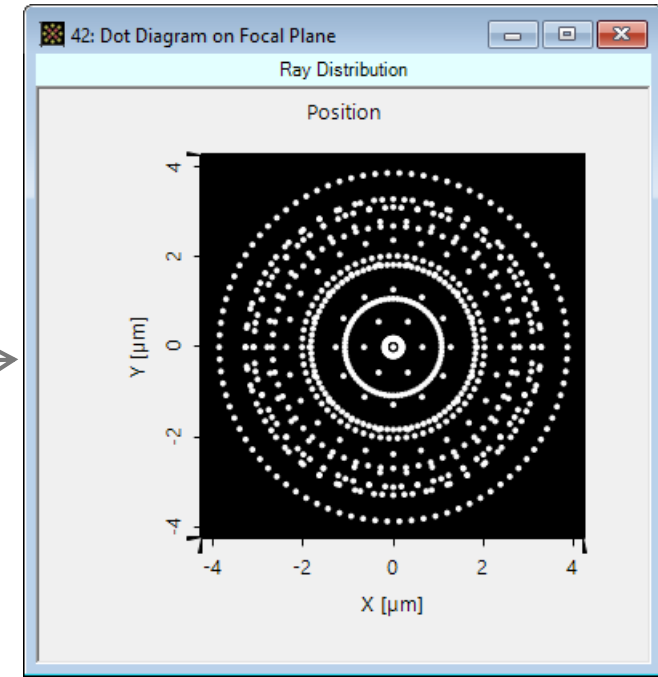


The beam diameter (RMS) evaluated with ray tracing is $5.11 \mu\text{m}$.


Field Tracing Evaluation at Ray-Optics Focal Distance

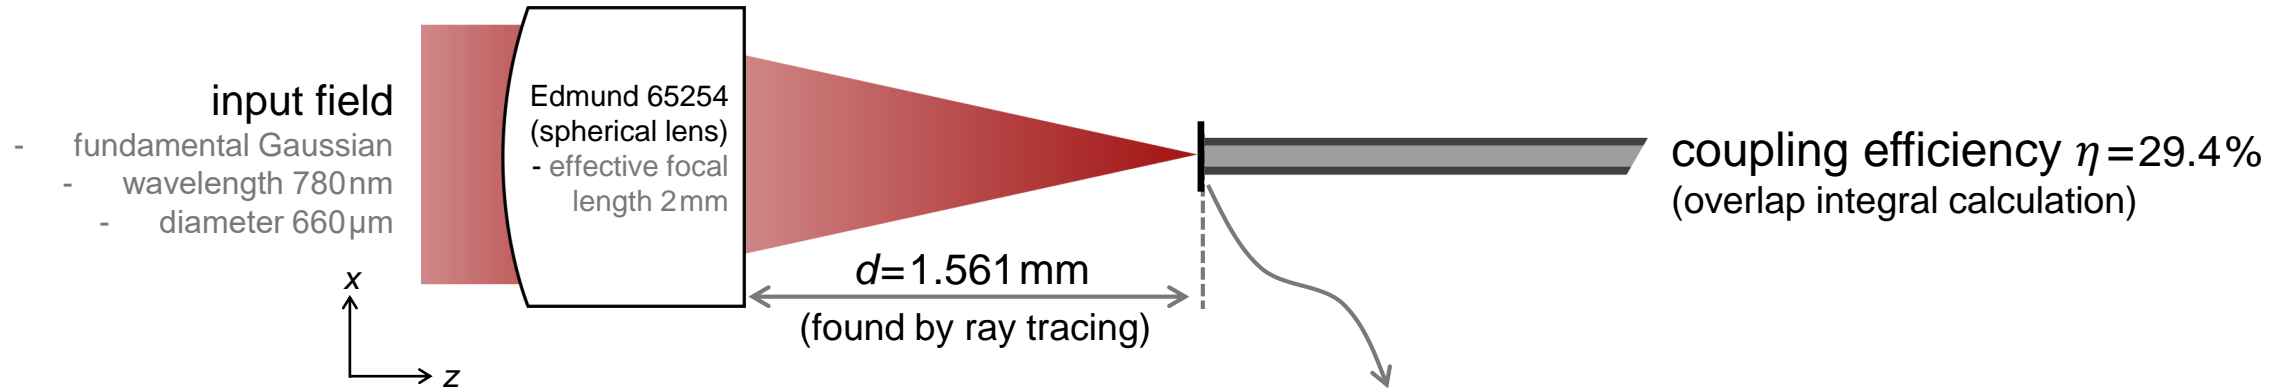

Field tracing in VirtualLab provide access to the full field information at any desired plane in the system.

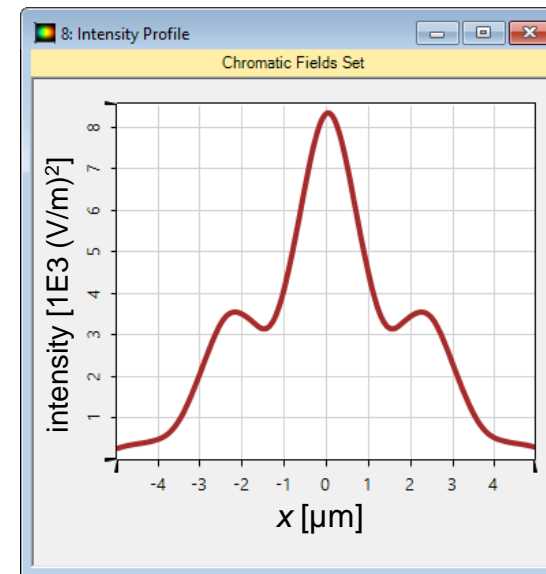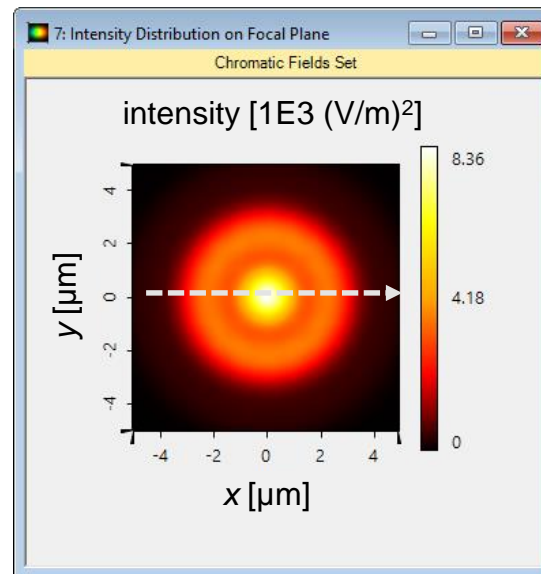

Find Optimal Working Distance by Using Field Tracing

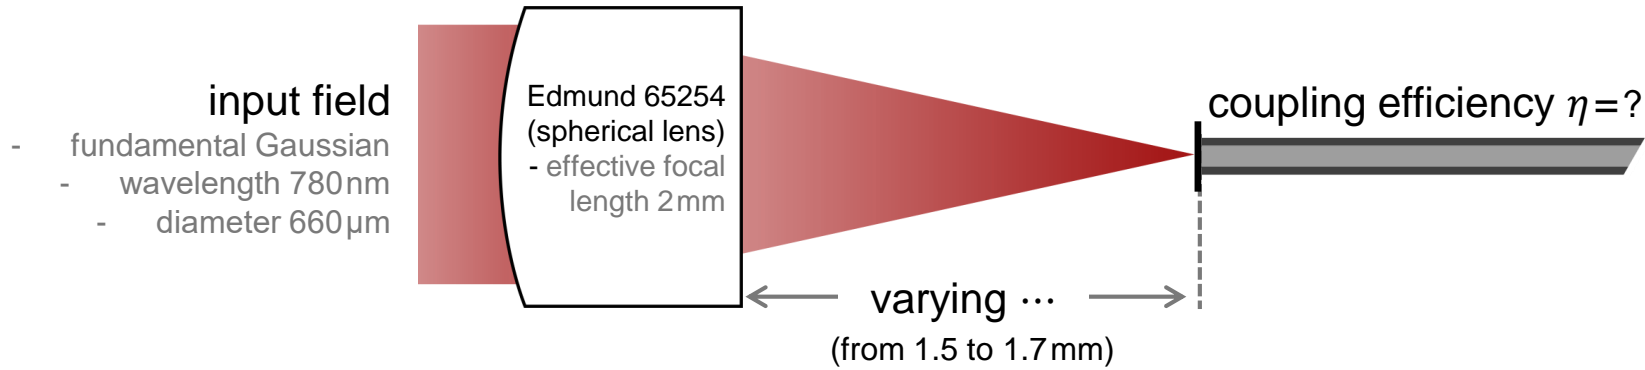


13: C:\Users\...\Fiber coupling with spherical lens Edmund_65254_PhysicalOptics.lpd_ParameterRun.run

Results
Start the parameter run and analyze its results

Go!


Use Cached Results for Next Run

Detector	Subdetector	Combined Output	Iteration Step					
			196	197	198	199	200	
Varied Parameters	Distance Before (Identity O...	Data Array	.695 mm	1.696 mm	1.697 mm	1.698 mm	1.699 mm	1.7
Fiber Coupling Efficiency #...	Fiber Coupling Efficiency	Data Array	3.7805 %	3.7067 %	3.6351 %	3.5657 %	3.4982 %	3.432


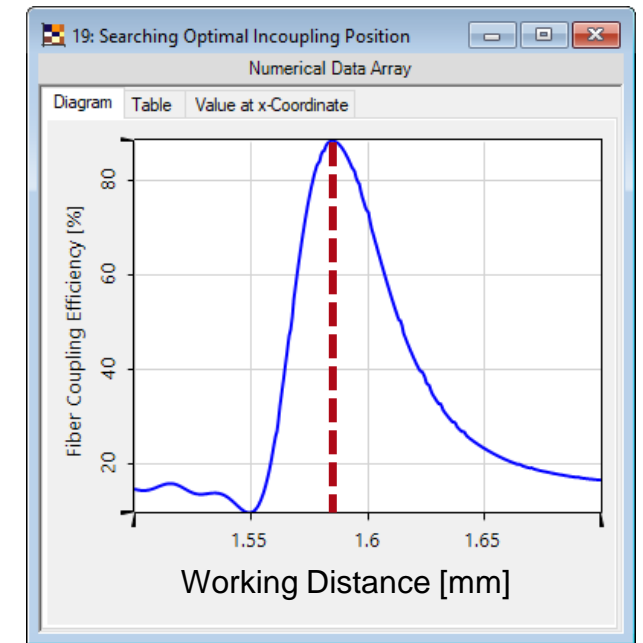


The optimal working distance found by field tracing is 1.585 mm.

Evaluation at Optimal Working Distance


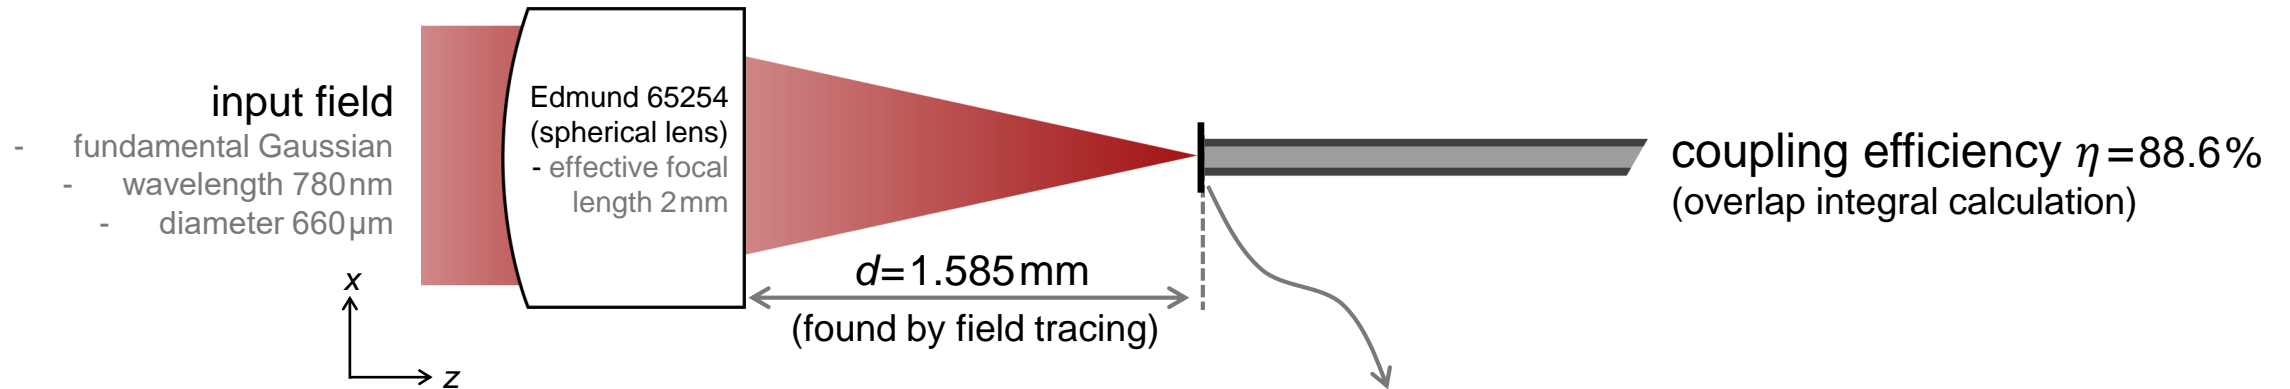


The calculation of the focal spot and the evaluation of the coupling efficiency takes only 2 seconds!

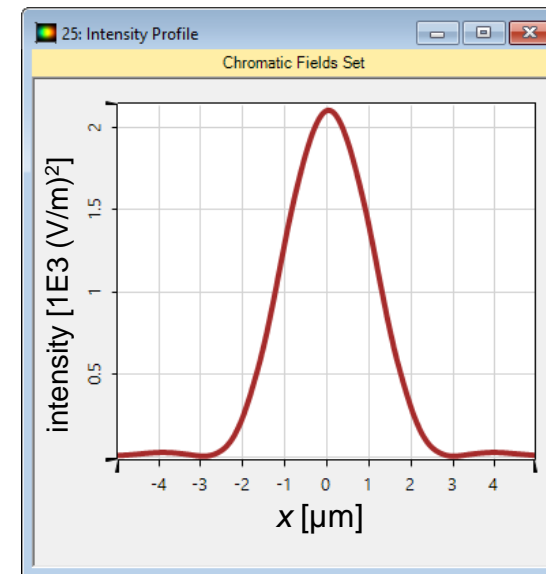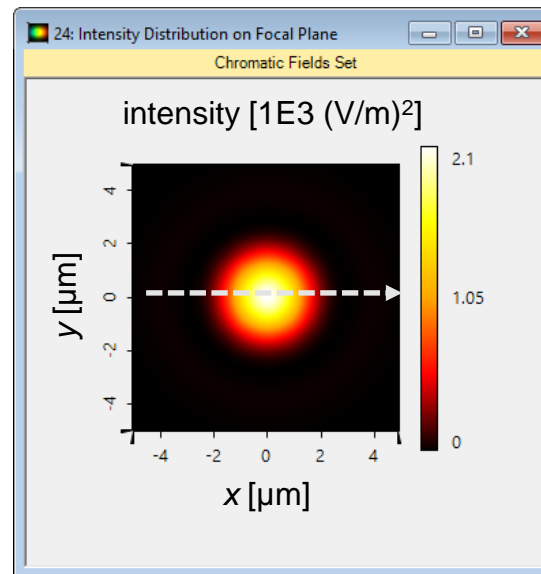


Peek into VirtualLab


ParameterRun for selected variables in system

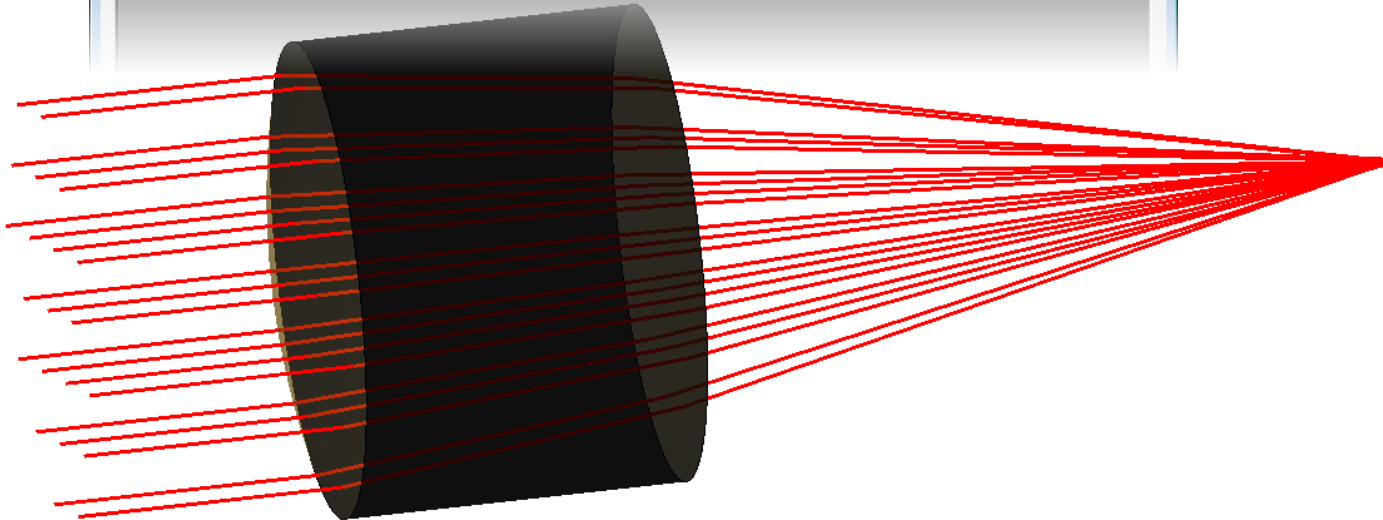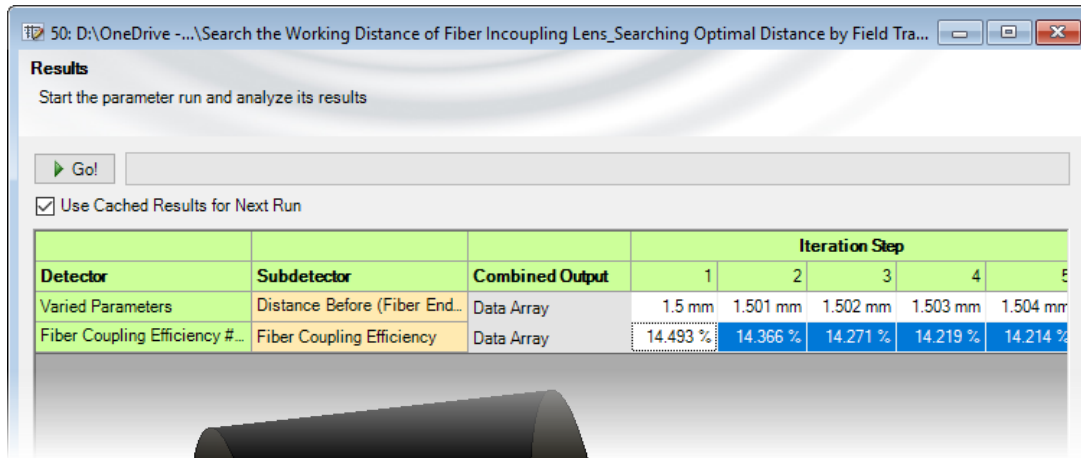

ray tracing system analysis

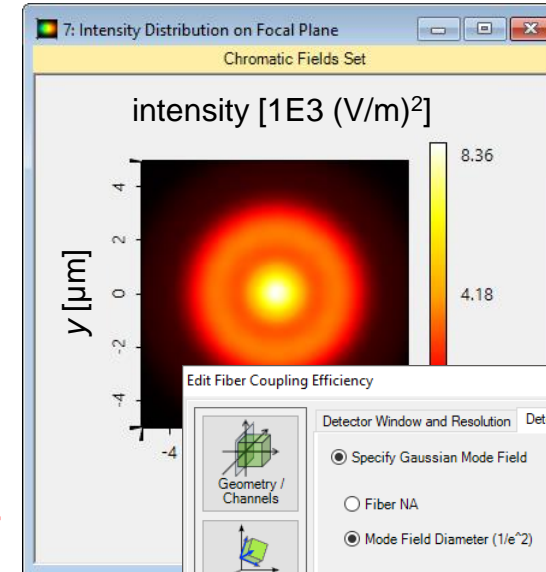


visualization and analysis


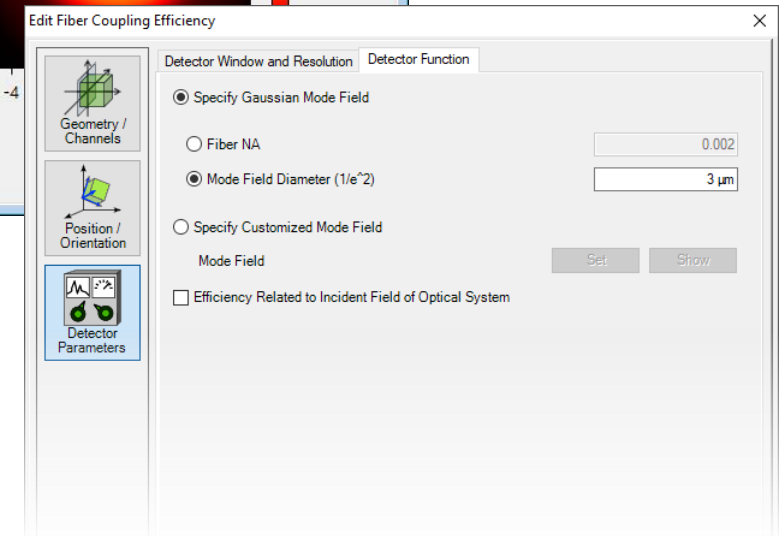


Workflow in VirtualLab

- Set up input Gaussian field
- Import coupling lens from Zemax file
 - [Import Optical Systems from Zemax](#)
- Find focal distance using ray optics
- Evaluate fiber coupling efficiency for initial working distance with field tracing
- Use Parameter Run to find optimal working distance

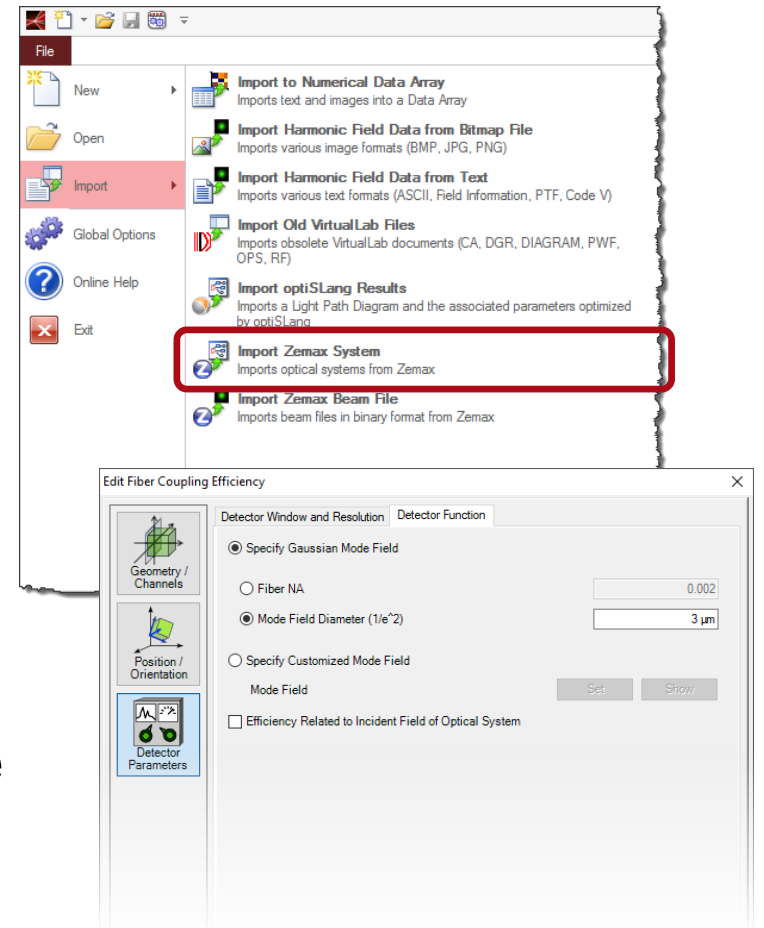

VirtualLab Technologies

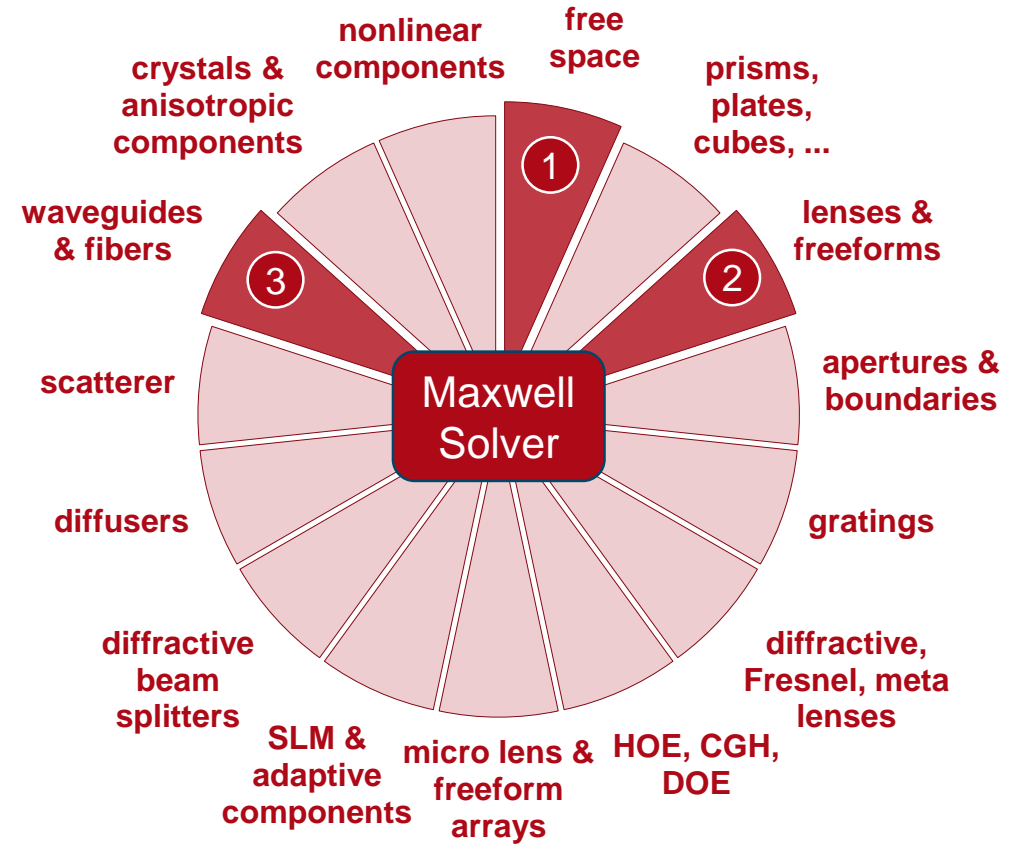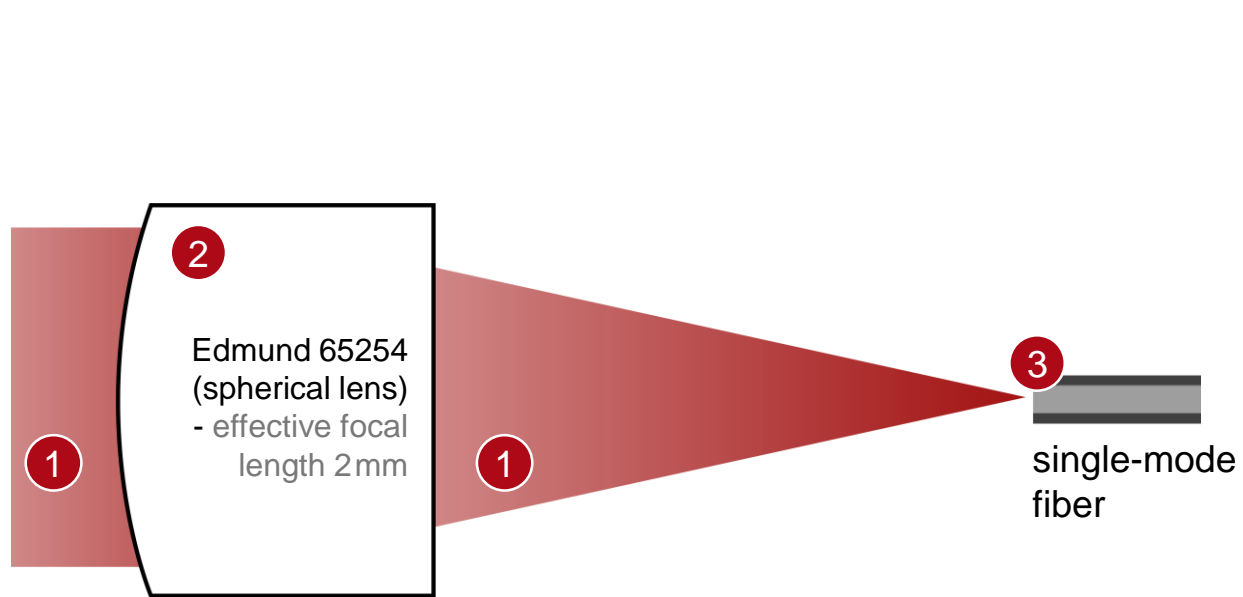

Document Information

title	Optimal Working Distance for Coupling Light into Single-Mode Fibers
document code	FCP.0001
version	1.0
toolbox(es)	Starter Toolbox
VL version used for simulations	7.4.0.49
category	Application Use Case
further reading	<ul style="list-style-type: none">- Comparison of Different Lenses for Fiber Coupling- Parametric Optimization of Fiber Coupling Lens