



Programming Radially & Azimuthally Polarized Sources

Abstract

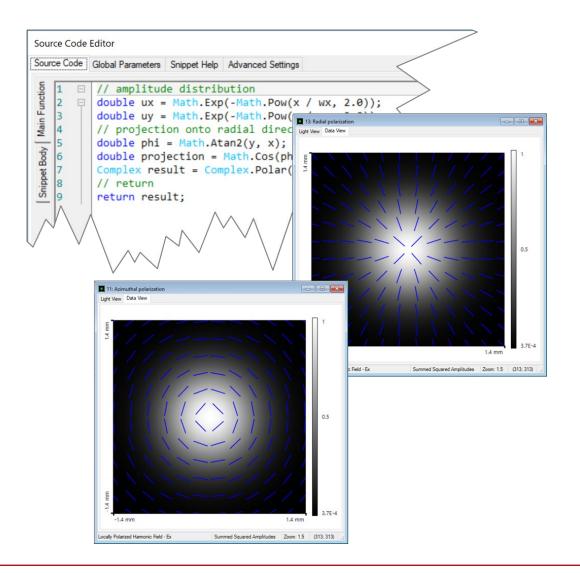


Polarization is one of the most characteristics properties of light, with much beyond the basic concept of global polarization, where light can only be linearly, circularly or elliptically polarized. We present here how to create in VirtualLab Fusion a radially and an azimuthally polarized source, illustrating in the process the programming of light sources and the potential of the Combined Light Source feature.


Custom Radially & Azimuthally Polarized Light Sources

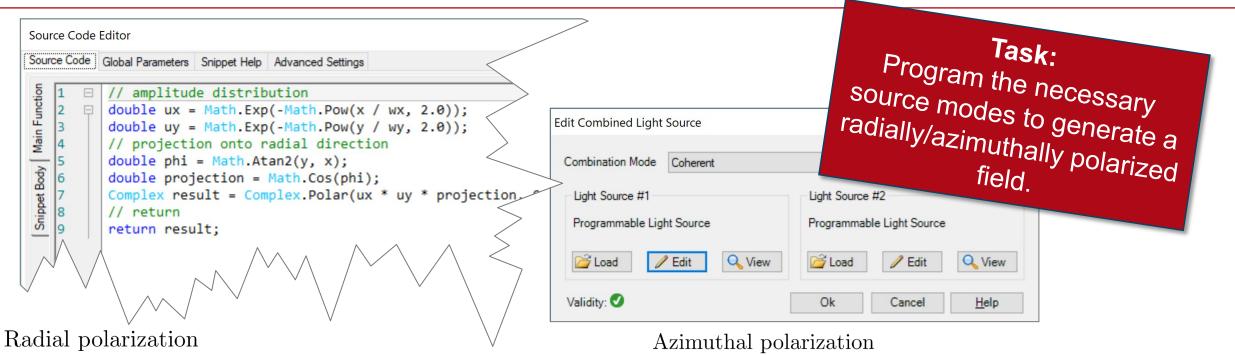

 $\boldsymbol{E}_{\perp}(x,y) = U(x,y) \left[\cos\varphi \,\hat{\boldsymbol{e}}_x + \sin\varphi \,\hat{\boldsymbol{e}}_y\right]$

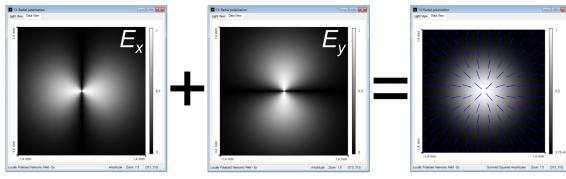

 $\boldsymbol{E}_{\perp}(x,y) = U(x,y) \left[-\sin\varphi \,\hat{\boldsymbol{e}}_x + \cos\varphi \,\hat{\boldsymbol{e}}_y\right]$

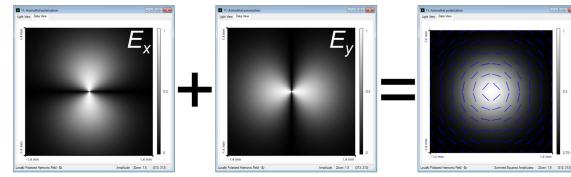

title	Programming Radially & Azimuthally Polarized Sources
document code	CZT.0105
version	1.0
toolbox(es)	Starter Toolbox
VL version used for simulations	7.4.0.49
category	Feature Use Case
further reading	 <u>Customizable Help for Programmable Elements</u> <u>How to Work with the Programmable Light Source and Example</u> (Gaussian Beam)